


lubricant 305C

For Higher Quality In Offset Printing

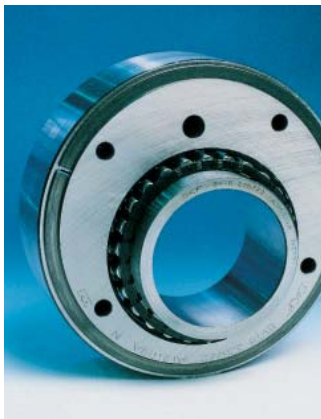

Print quality and profitability are directly related to the choice lubricants.

Application

The printcom lubricant 305C is an extremely adherent grease for heavy loads in slide and anti-friction bearings as well as open greasing points.

It is particularly suited for heavily loaded slide bearings, open gearwheels, cams, cam rollers and slideways.

The printcom lubricant 305C can be used within the temperature range of -20 °C to +120 °C, short-term up to +130 °C.

Advantages

- Superb adhesiveness
- Extremely high load capacity
- Excellent wear protection
- Superb corrosion protection
- Excellent protection against jamming
- Cold and hot water resistant
- Compatible with all non-ferrous metals and all common sealing compounds
- Outstanding aging resistance



Each printcom lubricant has been thoroughly tested by manroland's research and development departments for its mechanical and dynamic properties, its in-press corrosion and wear characteristics, and for its resistance to aging. Use of these products will ensure efficient production processes, with the added benefit of preserving the life and value of your press.

printcom stands for "print competence" and represents manroland's offering of process-compliant system components for the printing industry. Customer satisfaction is our top priority, and the printcom team is here to serve you.

Technical Data

Chemical Composition	mineral oil, lithium soap, active agents molybdenumdisulfide
Colour	black
Density at 25 °C (DIN 51757)	ca. 0.95 g/cm ³
Consistency Class	NLGI 2
Base Oil Viscosity at 25 °C	631 mm ² /s
Base Oil Viscosity at 40 °C	272 mm ² /s
Base Oil Viscosity at 100 °C	26 mm ² /s
Dropping Point (DIN ISO 2176)	> 180 °C
Temperature Range	-20 °C to +120 °C short-term up to +130 °C
Worked Penetration (DIN ISO 2137)	265 E to 295 E
Water Resistance (DIN 51807)	0 - 90
Oil Separation (DIN 51817)	< 2 (K)

Application Area and Approvals

Application Area	greasing cams and spindles
Approvals	ROLAND 300

Packaging Units

All packaging units are non-returnable.

Cartridges	400 g
------------	-------

Augsburg.1.0608, us-englisch, lubricant 305C



manroland, Inc.
800 East Oak Hill Drive
Westmont, IL 60559
vox 630 920 2000
fax 630 321 3154
printcom@manroland.us
www.manroland.us

manroland